


Gradient min.  $\nabla$  10 mm/m

**EuroREK NS10 SL GRP grease separator (EN1825)**  
Nominal size NS10 l/s  
Indoor installation model (On the floor)

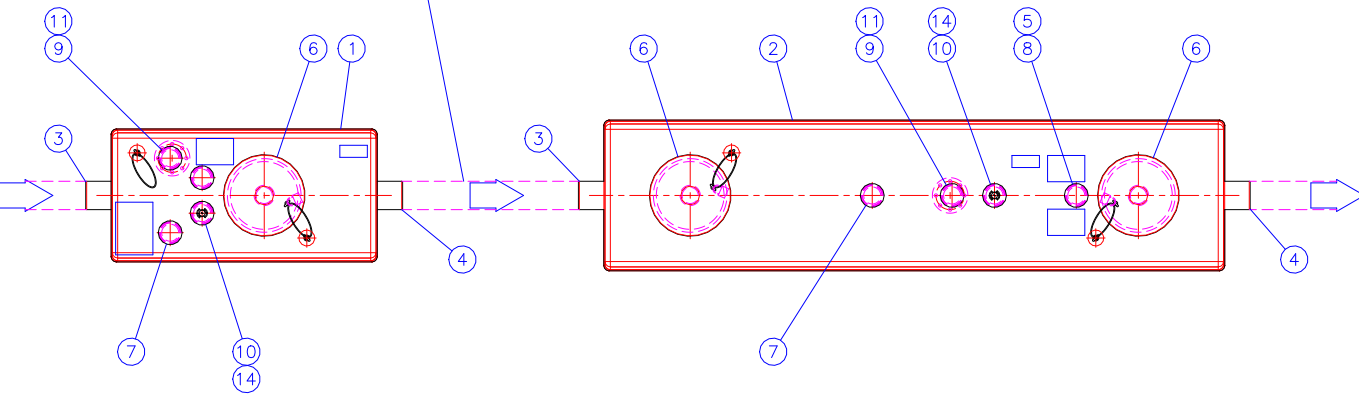

1	Sludge part (1/2) GRP body (750x1180, L=1500 mm) pH 3-10/Heat endurance continued 60°C (temporary max. 80°C) Vs  Sludge storage capacity	1000 l	1
2	Grease part (2/2) GRP body (850x1180, L=3500 mm) pH 3-10/Heat endurance continued 60°C (temporary max. 80°C) Ve  Effective volume Vg  Grease storage capacity	2400 l 400 l	1
3	Inlet sewer	D160	2
4	Outlet sewer	D160	2
5	Grease alarm		1
6	Maintenance hole with odourproof cover	ø454/382 mm	3
7	Ventilation outlet	D110	2
8	Inlet for probes	D110	1
9	Inlet for Emptying pipe	D110	2
10	Inlet for Washing nozzle	D110	2

ACCESSORIES:		
11	Emptying pipe with flange, PVC, DN80 (Sludge part)	(x) <input type="checkbox"/>
	Emptying pipe with flange, PVC, DN80 (Grease part)	<input type="checkbox"/>
12	Imubox quick coupling box for 1 pc. DN80 Suction pipes	(x) <input type="checkbox"/>
	Tuplaimubox quick coupling box for 2 pcs DN80 Suction pipes	<input type="checkbox"/>
13	Data Transfer Unit	(x) <input type="checkbox"/>
14	Washing nozzle (2 pcs)	(x) <input type="checkbox"/>

<b>Title:</b> EuroREK NS10 SL GRP Grease separator (EN1825)			<b>Drawing type:</b> CUSTOMER DRAWING	
<b>Design by:</b> HT/JS	<b>Approved by:</b> HT 18.05.2018	<b>Drawing no.:</b> 32BB31_e	<b>Date:</b> 17.05.2018	<b>Scale:</b>
<b>Construction site:</b>				

This drawing and the technical information included in the drawing are property of Wavin-Labko. All the national regulations concerning this product have to be checked before purchase of the product. Installation have to be done according to installation manual.



**wavin**  
**Labko**  
CONNECT TO BETTER

WAVIN-LABKO Ltd.  
VISIKATU 1  
FIN-33720 TAMPERE  
FINLAND  
tel. +358 20 1285200  
fax. +358 20 1285280