


Grease separators for below ground installations

Labko EuroREK[®] NS15...NS75 grease separators for cleaning greasy wastewater

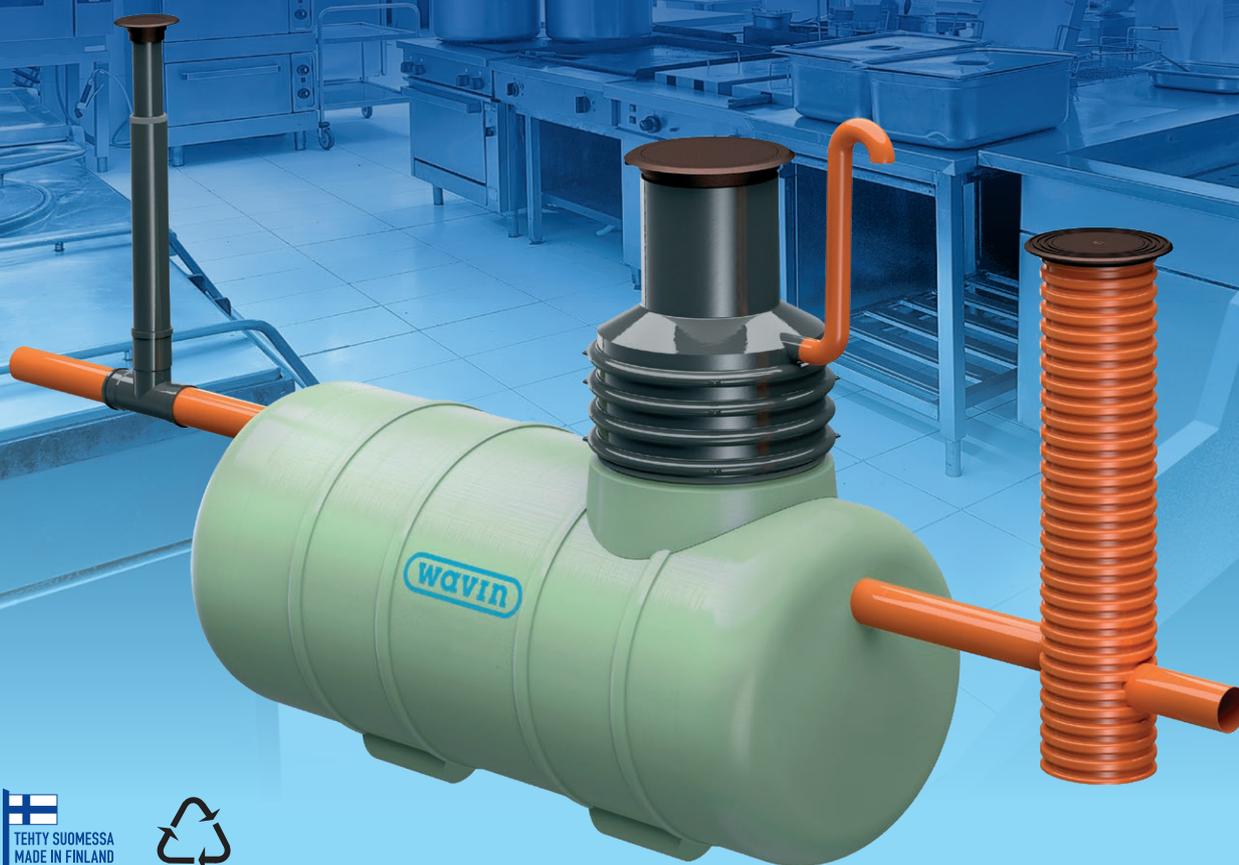

The Labko grease separators are reliable entities manufactured in Finland and ready to be installed. They include a separator, a service pit and a grease alarm. These separator systems ensure that the sewer system operates faultlessly.

The Labko EuroREK NS15...NS75 grease separators are intended for large sites, such as the food industry, institutional kitchens or refineries. They fulfil the requirements of the authorities and the EN standards.





Features

EuroREK NS15...NS75 grease separators are mainly used in large sites and they are primarily installed outdoors below ground. The separators are manufactured from reinforced plastic using a filament winding machine. The temperature resistance of grease separators made from reinforced plastic is +60 °C and +80 °C momentarily. Temperature studies on grease separators found that wastewater temperatures rise so much that, especially in larger sizes, PE plastic can no longer be considered a viable option for the tank.

EuroREK NS15...NS35 grease separators are always equipped with one watertight EuroHUK 600 service pit. The larger models, EuroREK NS50 and upwards, always contain two service pits. We recommend gastight covers for applications that are located in courtyards or otherwise sheltered from the wind.

EuroREK	Length mm	Width mm	Height mm	Socket size mm	Weight kg
NS15	3500	1650	1950	D200	325
NS20	4600	1650	1950	D200	450
NS25	4550	2250	2550	D200	700
NS35	5450	2250	2550	D250	800
NS50	7500	2250	2550	D250	1050
NS75	11000	2250	2550	D250	1400



EuroREK NS50 and NS75 grease separator

Applications

- › Institutional kitchens
- › Catering
- › Food industry
- › Fish processing
- › Abattoirs

Benefits and advantages

- › Fulfills the requirements of the grease separator standard EN 1825 according to tests
- › Alarm system for grease room level and filling included as part of standard delivery
- › Temperature resistance +60 °C, +80 °C momentarily
- › Light to transport, quick and easy to install
- › A Finnish product with a long life cycle
- › Easy to maintain through the large, watertight EuroHUK service pit (EN 476)
- › The option to use suction emptying eases use of the product

EuroREK grease separator accessories (recommended for site-specific equipment)

- › Data transfer unit
- › IMUBOX (suction box) quick coupling case (suction pipe)
- › Anchoring belts and plates
- › Service pit heating set for ground installations
- › Gastight covers
- › Inspection pipe set and sampling pit

EuroREK NS15...NS35 grease separator

